

NEW

Dometic Sea Xchange SX Watermakers

Continuous High Performance Meets High Output Demands



Dometic Sea Xchange SX600 reverse-osmosis watermaker system

For boats that require larger volumes of reliable water production, the Dometic Sea Xchange SX watermaker series provides up to 2,200 GPD (8,328 LPD) using reverse-osmosis technology to turn seawater into potable water.

The powerful but compactly designed Sea Xchange SX fits anywhere. The 2-in-1 modular or compact frame lets you make the best use of any available installation space.

Built for marine reliability, durability and rust resistance, the SX Series has a 316 stainless-steel high-pressure pump, 316 stainless-steel flow and pressure components, and 316 stainless-steel boost pump motor shaft. The high-pressure pump and the boost pump are the most durable and efficient pumps available. The totally enclosed, fan cooled (TEFC) motor has thermal protection.

Other features include an automatic freshwater flush, easy-to-use backlit computer controller display and an optional remote control. The high-rejection seawater membranes are commercially available and the system is fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD). Sea Xchange SX watermakers are made in the USA.

Key Benefits

- 2-in-1 modular or compact frame design
- Durable and reliable
- 316 stainless-steel flow and pressure components
- 316 stainless-steel booster pump and high-pressure pump motor shafts
- 316 stainless-steel high-pressure pump
- TEFC motor with thermal motor protection
- Computer controller with backlit display
- Optional remote control
- Tank switch input allows for automatic shut off
- Automatic freshwater flush
- High-rejection seawater membranes
- Commercially available seawater membranes
- Fully upgradable from 600 GPD (2,271 LPD) to 2,200 GPD (8,328 LPD)

Special Options

- Remote control
- 316 stainless-steel commercial pre-filter housing




Modular SX 600 GPD shown



Specifications for Dometic Sea Xchange SX Watermakers


Model	SX600	SX1200	SX1800	SX2200	Booster Pump	HP Pump
Capacity Per Hour (gal/l)	25/94.6	50/189.3	75/283.9	92/348.3	N/A	N/A
Capacity Per 24 Hours (gal/l)	600/2,271	1,200/4,542	1,800/6,814	2,200/8,328	N/A	N/A
Amperage	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	14.0A @ 230V/60Hz 15.4A @ 220V/50Hz	3.6A @ 230V/60Hz 4.4A @ 220V/50Hz	10.4A @ 230V/60Hz 11.0A @ 220V/50Hz
Membrane Quantity	1	2	3	4	N/A	N/A
Net Weight (lbs/kg)	145/66	155/71	165/75	175/80	Included In Net Weights	Included In Net Weights
Shipping Weight (lbs/kg)	225/102.0	245/111.1	265/120.2	285/129.3	Included In Shipping Weights	Included In Shipping Weights
Shipping Dimensions (H X W X D)	31 X 41.5 X 48.5 in. (762 X 1,055 X 1,232 mm)					

Dimensions

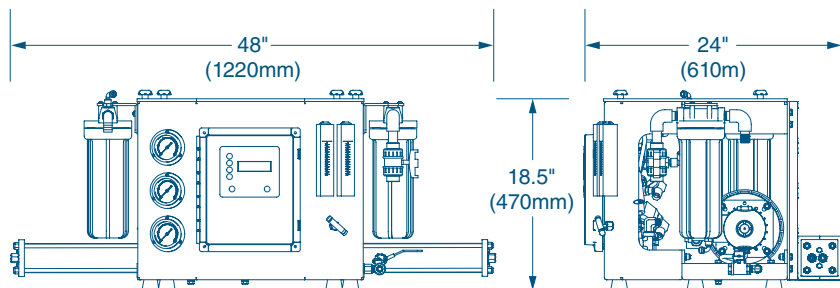

FRAMED UNIT ▲

MODULAR COMPONENTS ▼

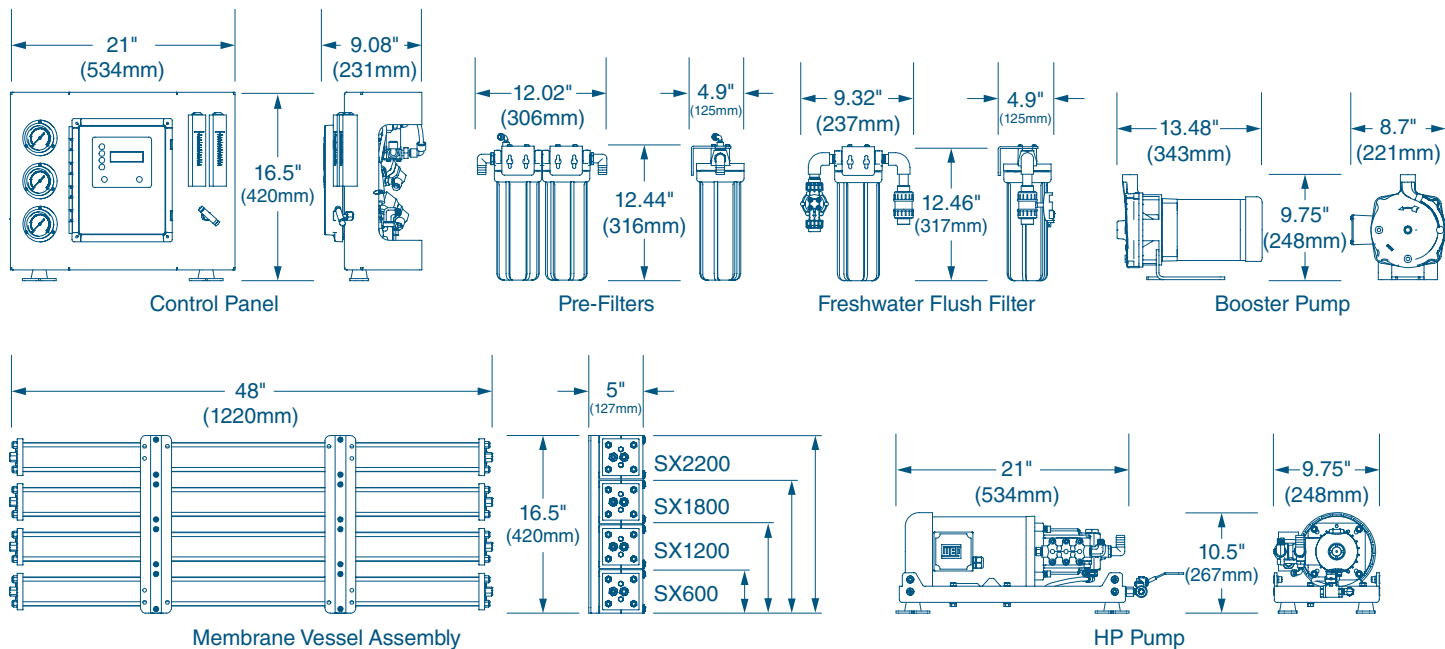

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477
After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101
For all other areas visit our website to find your nearest distributor.

